



# 電氣箱專用水冷式冷氣機

WATER-COOLED AIR CONDITIONER

EWA SERIES



## 適用機械種類

- 基地台機櫃箱
- 各種產業機械設備之電控箱

## 特性及功能


- 機器簡化輕巧、安裝容易、低噪音。
- 使用水冷式製冷，不需補充冷媒。
- 不受高溫環境影響，仍可正常運作。
- 利用廠務水或冰水機循環水二次利用，達到節能減碳效果。

## APPLICATION

- Electrical control panel for base station
- Industries with electrical control panel requirement

## FEATURE

- It is easy to install. Simple design with low noise.
- It is water type cooling, and does not need refrigerant refilling.
- It can be withstand high ambient temperature to run normally.
- It is saved energy and reduced carbon by using water tower or water chiller recycled water.

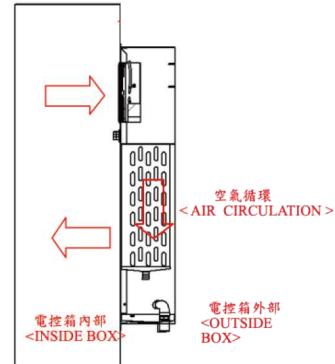

## 規格表 EWA SERIES SPECIFICATION

型式 Model		EWA-02		EWA-07		EWA-10		EWA-20	
冷卻液體需求流量 Cooling liquid flow rate	l/min	4		4		8		8	
流體壓力範圍 Liquid pressure range	bar			0.2-10					
熱交換量 Heat exchange capacity	W	200		700		1000		2000	
使用範圍 Operative range	室溫Room temperature			40°C ↓					
電源 Power source	V			1Ø AC 220V 50/60Hz					
總負荷電流 Total load current	A	0.4	0.2	0.4	0.2	0.8	0.4	0.8	0.4
風扇功率 Fan rated power	W	36		36		72		72	
外型尺寸 Dimension (D x W x H)	mm	288x140x527		325x140x670		415x140x730		440x170x800	
總重量 Weight	kg	7		11		16		22	

\* 能力測試數據標準點(室溫35°C、控制箱內溫度35°C) (參考值)

\* 特殊規格設計及其它電壓需求請與我司聯絡

\* 本公司因技術需求或升級有隨時更改內容、文字、產品規格之權利，變更恕不另行通知。

\* Standards of capability test data: Room temperature:35°C, Electric control panel temperature:35°C (F.Y.R)

\* If you have special specifications or need of other Voltage, please contact us.

\* If our company has technical or upgrade requirements, we reserve right to change contents, words, and product specifications without further notice.